



**DATE: 06 October 2014**

**I.T.L. (PRODUCT TESTING) LTD.**

**Test Report According to  
EN 301 489-1 V1.9.2;  
EN 301 489-7 V1.3.1**

for

**Starcom GPS Systems Ltd.**

Equipment under test:

**Container Tracker**

**Triton R**

Written by: *Ronit Pinchuck*  
R. Pinchuck, Documentation

Approved by: *A. Yizhak*  
A. Yizhak, Test Engineer

Approved by: *I. Raz*  
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd. This report relates only to items tested.



# TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION -----</b>	<b>3</b>
	1.1 Administrative Information.....	3
	1.2 Abbreviations and Symbols.....	4
	1.3 List of Accreditations .....	5
<b>2.</b>	<b>APPLICABLE DOCUMENTS -----</b>	<b>6</b>
<b>3.</b>	<b>TEST SITE DESCRIPTION -----</b>	<b>7</b>
	3.1 Location:.....	7
	3.2 Shielded Room.....	7
	3.3 Open Site: .....	7
	3.4 Ground Plane: .....	7
	3.5 Antenna Mast: .....	7
	3.6 Turntable: .....	7
	3.7 EMI Receiver:.....	8
	3.8 E.U.T. Support:.....	8
	3.9 Test Equipment: .....	8
<b>4.</b>	<b>SUMMARY OF TEST RESULTS-----</b>	<b>9</b>
<b>5.</b>	<b>EQUIPMENT UNDER TEST (E.U.T.) DESCRIPTION -----</b>	<b>10</b>
<b>6.</b>	<b>LIST OF TEST EQUIPMENT -----</b>	<b>11</b>
	6.1 Immunity Tests.....	11
<b>7.</b>	<b>E.U.T. PERFORMANCE VERIFICATION -----</b>	<b>12</b>
	7.1 Mode of Operation.....	12
	7.2 Monitoring of E.U.T. ....	12
	7.3 Definition of Failure .....	12
<b>8.</b>	<b>IMMUNITY TO ELECTROSTATIC DISCHARGE -----</b>	<b>13</b>
	8.1 Test Specification.....	13
	8.2 Test Procedure.....	13
	8.3 Test Results .....	13
<b>9.</b>	<b>IMMUNITY TO RADIATED FIELD -----</b>	<b>19</b>
	9.1 Test Specification.....	19
	9.2 Test Procedure.....	19
	9.3 Test Results .....	19
<b>10.</b>	<b>SET UP PHOTOGRAPHS -----</b>	<b>21</b>
<b>11.</b>	<b>SIGNATURES OF THE E.U.T'S TEST ENGINEERS -----</b>	<b>22</b>



# 1. General Information

## 1.1 Administrative Information

Manufacturer:	Starcom GPS Systems Ltd.
Manufacturer's Address:	33 Jabotinsky St., Ramat-Gan, 52511, Israel Tel: +972-3-619-9901 Fax: +972-3-619-9954
Manufacturer's Representative:	Vadim Leitman
Equipment Under Test (E.U.T):	Container Tracker
Equipment Model No.:	Triton R
Equipment Serial No.:	300980
Date of Receipt of E.U.T:	22.09.14
Start of Test:	22.09.14
End of Test:	23.09.14
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	See Section 2

## 1.2 Abbreviations and Symbols

The following abbreviations and symbols are applicable to this test report:

A/m	ampere per meter
AC	alternating current
AM	amplitude modulation
ARA	Antenna Research Associates
Aux	auxiliary
Avg	average
CDN	coupling-decoupling network
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB $\mu$ V	decibel referred to one microvolt
dB $\mu$ V/m	decibel referred to one microvolt per meter
DC	direct current
EFT/B	electrical fast transient/burst
EMC	electromagnetic compatibility
ESD	electrostatic discharge
E.U.T.	equipment under test
GHz	gigahertz
HP	Hewlett Packard
Hz	Hertz
kHz	kilohertz
kV	kilovolt
LED	light emitting diode
LISN	line impedance stabilization network
m	meter
mHn	millihenry
MHz	megahertz
msec	millisecond
N/A	not applicable
per	period
QP	quasi-peak
PC	personal computer
RF	radio frequency
RE	radiated emission
sec	second
V	volt
V/m	volt per meter
VRMS	volts root mean square



### **1.3 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
3. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan),  
Registration Numbers: C-3006, R-2729, T-1877, G-245.
4. Industry Canada (Canada), File No. IC 6183.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

## 2. Applicable Documents

- |     |   |  |
|-----|---|--|
| 2.1 | <b>R&amp;TTE Directive:<br/>1999</b>                              | <i>DIRECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity</i>   |
| 2.2 | <b>EN 301 489-1 V1.9.2:<br/>2011</b>                              | <i>Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements</i>  |
| 2.3 | <b>EN 301 489-7 V1.3.1:<br/>2005</b>                              | <i>Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 7: Specific conditions for mobile and portable radio and ancillary equipment of digital cellular radio telecommunications systems (GSM and DCS)</i> |
| 2.4 | <b>EN 55022: 2006 +<br/>Amendment A1: 2007</b>                    | <i>Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment.</i>   |
| 2.5 | <b>EN 61000-4-2: 2009</b>   | <i>Electromagnetic Compatibility (EMC), Part 4: Testing and Measurement Techniques; Section 2: Electrostatic discharge immunity test: Basic EMC publication.</i>   |
| 2.6 | <b>EN 61000-4-3: 2006 +<br/>Amendments<br/>A1: 2008; A2: 2010</b> | <i>Electromagnetic Compatibility (EMC), Part 4: Testing and Measurement Techniques; Section 3: Radiated, radio frequency, electromagnetic field immunity test.</i>   |

## 3. Test Site Description

### 3.1 Location:

The Electromagnetic Compatibility Test Facility of I.T.L. (Product testing) Ltd. Is located at

Telrad Industrial Park, Lod, 7120101 Israel.

Telephone: +972-8-9153100

Fax: +972-8-9153101

### 3.2 Shielded Room

A Modular Shielded Room, Type 20 SpaceSaver, manufactured by ETS, consisting of a Main Room and a Control Room.

The dimensions of the Main Room are: length: 7.0 m, width: 3.0 m, height: 3.0 m.

The shielding performance is:

magnetic field: 60 dB at 10 kHz rising linearly to 100 dB at 100 kHz,

electric field: better than 110 dB between 50 MHz and 1 GHz,

plane wave: 110 dB between 50 MHz and 1 GHz.

All the power lines entering the shielded room are filtered.

### 3.3 Open Site:

The OATS is located on a one floor-building roof. The OATS consists of 3 meter and 10 meter ranges, using a 21.5m X 8.5m solid metal ground plane, a remote controlled turntable and an antenna mast.

### 3.4 Ground Plane:

The ground plane is made from steel plates, which are welded continuously together. The Ground plane is lies and welded on welded steel construction with vias to allow for water drainage. All the power, control, and signal lines to the turntable and the 3 m and 10m antenna mast outlets are routed in shielded conduits under the plane to the control building.

### 3.5 Antenna Mast:

ETS model 2070-2. The antenna position and polarization are remote controlled via Fiber Optical Link using ETS/EMCO Dual Controller Type 2090. The antenna position is adjustable between 1-4 meters. Pressurized air is used to power changing the polarity of the antenna.

### 3.6 Turntable:

ETS model 2087 series. The position of the turntable is remote-controlled via Fiber Optic Link, using ETS/EMCO Dual Controller Type 2090. The turntable is mounted in a pit and its surface is flush with the Open Site Ground Plane. Brushes near the periphery of the turntable ensure good conductive connection to the ground plane. The Turntable maximum load is 1250 Kg.



**3.7 EMI Receiver:**

Type ESIB7, manufactured by Rohde & Schwarz, being in full compliance with CISPR 16 requirements.

**3.8 E.U.T. Support:**

Table mounted E.U.T.s are supported during testing on 80 cm high all plastic table.

**3.9 Test Equipment:**

See details in Section 6.



## 4. Summary of Test Results

Test	Results
<p><b>ESD</b> EN 61000-4-2: 2009 Air Discharge, 8kV Contact Discharge, 4kV</p>	<p>The E.U.T met the performance requirements of the specification.</p>
<p><b>Radiated Immunity</b> EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010 (80-1000; 1400-2700 MHz) 3 V/m, 80% A.M. by 1kHz</p>	<p>The E.U.T met the performance requirements of the specification.</p>



## 5. Equipment Under Test (E.U.T.) Description

Triton R is a sophisticated real-time container tracking device designed for monitoring and management purposes. It allows full control of various events and situations by automatic remote tracking, provides system stability and continuity of operations.

Utilizing its built in sensors, GPS location tracking and GPRS facilities for message communication the system can detect when the container has reached the customer and inform the recipient of every movement of the container. Any damage, blow or breaking into the container can be reported by email and SMS.

The device is easily installed on the container door frame and performs the monitoring of the container state and location. The system provides alerts on various events, such as door opening, breaking in through the side wall, door forcing, container tilt, fall, impact, etc.

## 6. List of Test Equipment

### 6.1 Immunity Tests

Equipment indicated below by an “X” used in Tests IEC 61000-4:-2,-3,-4,-5,-6,-8,-11.

Test equipment calibration is in accordance with ITL Q.A. Procedure PM 110, "Calibration Control Procedure", which complies with ISO 9002 and ISO/IEC Guide 17025.

Instrument	Manuf.	Model	Serial No.	Used in Test IEC 61000-4:								
				-2	-3	-4	-5	-6	-8	-11		
Transient Generator	KeyTek	CEMASTER	9612436									
Transient Generator	EM Test	EFT 500 F1	1198-01									
ESD Simulator	CDI	ESD 2000i	426	X								
ESD Simulator	Schaffner	NSG 435	174-002-001(Z1)	X								
Isotropic Field Probe	AR	EP-2080	23190		X							
RF Amplifier	AR	100W1000M1	19842		X							
Isotropic Field Monitor	AR	FM-2000	19719		X							
Biconilog Antenna	EMCO	3142B	1078		X							
Horn Antenna	A.H. systems	SAS 200/571	199		X							
RF Amplifier	OPHIR	5303081	1002		X							
RF Amplifier	IFI	SMX100	1194-4537		X							
RF Amplifier	IFI	M100	M612-0208		X							
Signal Generator	HP	8657A	2849U01094		X							
BulkF Current Probe	FCC	F-120-9	105									
CDN	FCC	FCC-801-M3-16A	9962									
Transient Wave- form Monitor	CDI	TWM-100	3233									
Phase Control Amplifier	CDI	PCA-1000	3217									
Single Phase Isolated Backfilter	CDI	CDI-1kVA	3221									
Surge Generator	CDI	CDI-1000i	3153									
1.2/50; 8/20usec AC Surge Unit	KeyTek	E551	9512398									
Surge Generator	EM TEST	UCS 500-M	1198-45									
AC Power Source	EM TEST	UCS 500-M	1198-45									
Current Generator	FCC	F-1000-4-8-125A	9838									
Magnetic Loop	FCC	F-1000-4-8/9/10-L-1M	9836									

## 7. E.U.T. Performance Verification

### 7.1 Mode of Operation

The E.U.T. was operated in normal mode transmitting the GSM signal every 10 seconds.

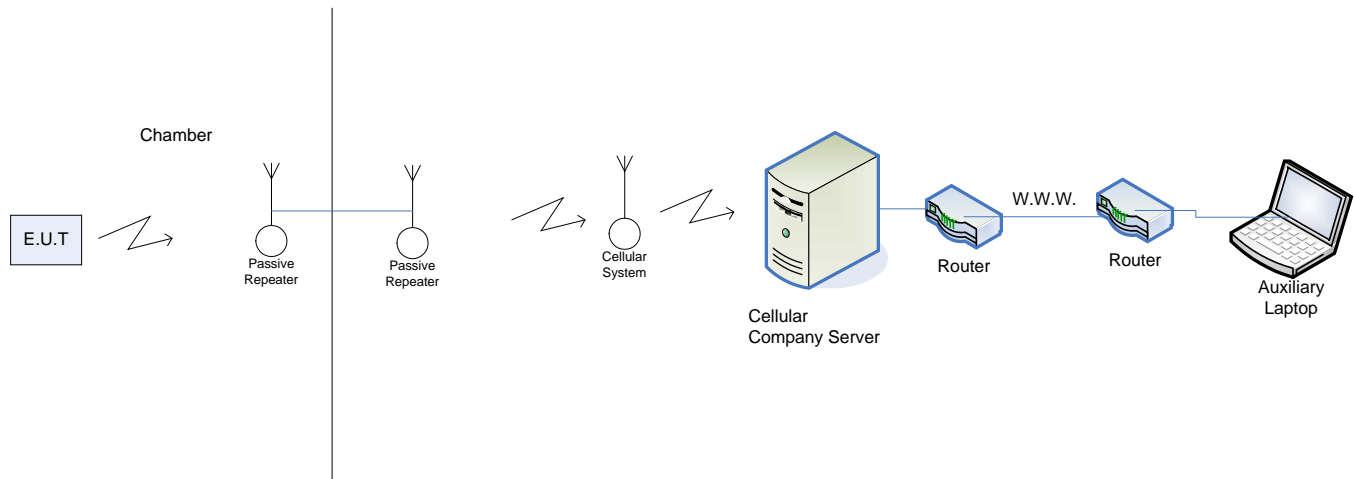


Figure 1. Test Set-up

### 7.2 Monitoring of E.U.T.

The transmission from the device can be observed in the online application.

### 7.3 Definition of Failure

1. No transmission from the device registered in the online application.
2. Pressing the EUT's buttons gives no response and initiates no transmission.

## 8. Immunity to Electrostatic Discharge

### 8.1 Test Specification

EN 61000-4-2: 2009

### 8.2 Test Procedure

In the case of tabletop equipment, the E.U.T. was set up on a wooden table 0.8m high on an insulating support 0.5 mm thick above the reference ground plane. In the case of floor-standing equipment, the EUT and cables were set up on an insulating support 0.1m above the reference plane. The test setup is illustrated in the photograph, *Figure 8. Immunity to Electrostatic Discharge Test.*

Photographs in *Figure 2* to *Figure 3* show the locations of test points.

#### 9.2.1 Air Discharge

Potentials of 2, 4 and 8 kV were applied near each applicable test point. At places where discharge occurred, the potential was applied twenty times; ten times negative and ten times positive. The E.U.T.'s performance during the test was verified as detailed in Section 7.

#### 9.2.2 Contact Discharge

Potentials of 2 and 4 kV were applied to each applicable test point. In places where discharge occurred, the potential was then applied twenty times; ten negative and ten positive discharges. The E.U.T.'s performance during the test was verified as detailed in Section 7.

#### 9.2.3 Indirect Discharge (vertical and horizontal coupling plane)

Potentials of 2 and 4 kV were applied to the center of the vertical edge of the coupling plane at a distance of 0.1 meters from the outer casing of the E.U.T. to each applicable test point.

The potential was applied 10 times for each polarity, to each location of the coupling plane. All four faces of the E.U.T. were completely illuminated.

An ESD of the same characteristics as for the vertical coupling plane was applied to the horizontal coupling plane, at each side of the E.U.T., at a distance of 0.1 meter from its outer casing.

Additional details are shown in Figure 5 of EN 61000-4-2: 2009.

The E.U.T.'s performance during the test was verified as detailed in Section 7.


### 8.3 Test Results

The E.U.T met the requirements of specification EN 61000-4-2: 2009.

# Immunity to Electrostatic Discharge

E.U.T Description	Container Tracker
Type	Triton R
Serial Number:	300980

Specification: EN 61000-4-2: 2009

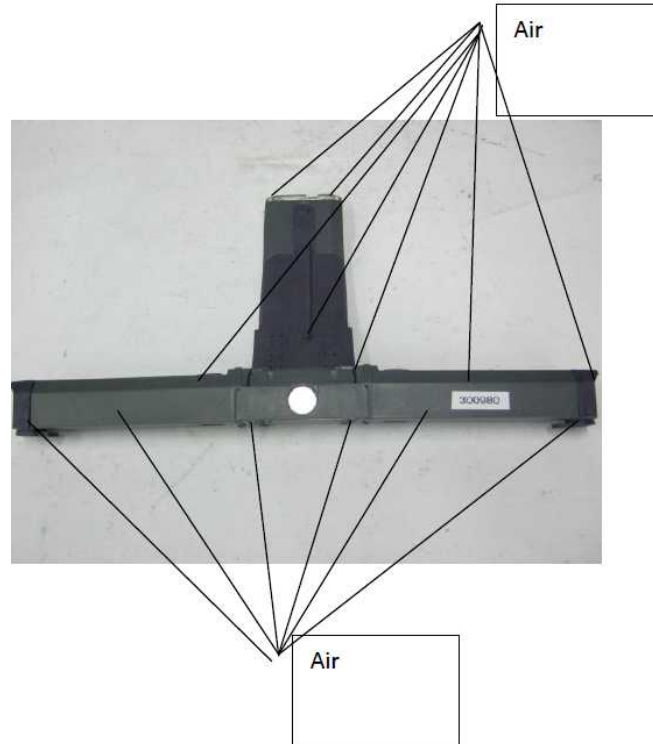

**Figure 2. ESD Test Points**

# Immunity to Electrostatic Discharge

E.U.T Description	Container Tracker
Type	Triton R
Serial Number:	300980

Specification: EN 61000-4-2: 2009



**Figure 3. ESD Test Points**

# Immunity to Electrostatic Discharge

E.U.T Description	Container Tracker
Type	Triton R
Serial Number:	300980

Specification: EN 61000-4-2: 2009



**Figure 4. ESD Test Points**



# Immunity to Electrostatic Discharge

E.U.T Description	Container Tracker
Type	Triton R
Serial Number:	300980

Specification: EN 61000-4-2: 2009


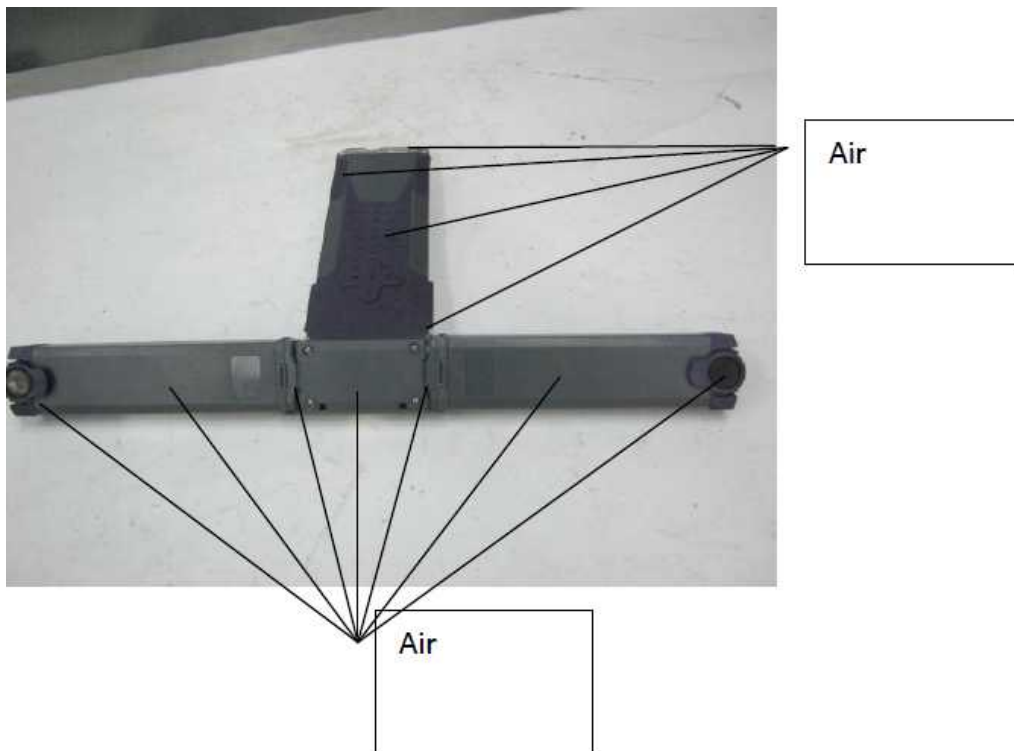


Figure 5. ESD Test Points

## Immunity to Electrostatic Discharge

E.U.T Description	Container Tracker
Type	Triton R
Serial Number:	300980

Specification: EN 61000-4-2: 2009

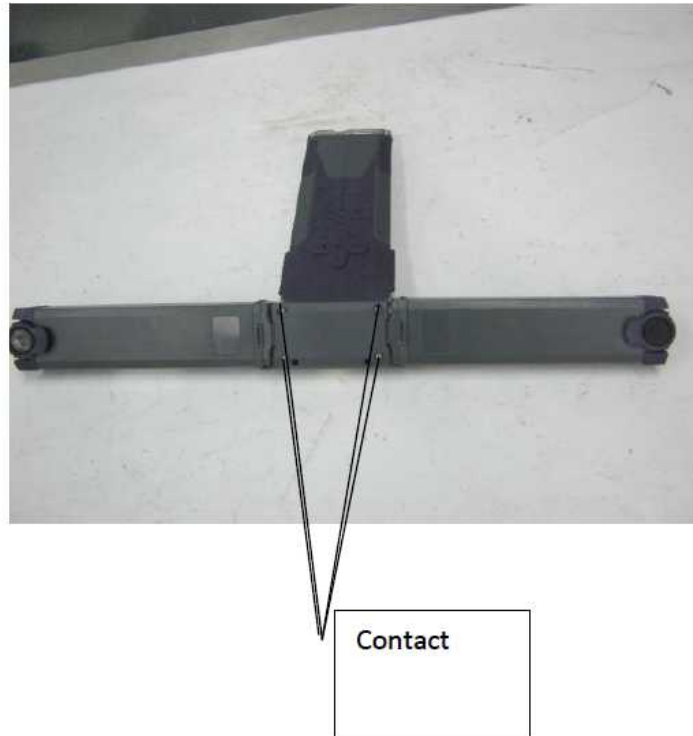

**Figure 6. ESD Test Points**

## 9. Immunity to Radiated Field

### 9.1 Test Specification

EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010

### 9.2 Test Procedure

The E.U.T. was subjected to a field of 3V/m, amplitude modulated 80% by a 1kHz sinusoidal signal.

The Radiated Field was applied in vertical and horizontal polarization using Biconilog Periodical antenna in the frequency range of 80-1000 and horn antennas in the frequency range of 1400 – 2700 MHz.

The Radiated Field was calibrated and tested for uniformity in accordance with Section 6.2 of IEC 61000-4-3.

The calibration values for the driver signal generator were based on the data given in I.T.L. "Radiated Immunity Calibration Test Report" No. PM-112R-IMM.

The frequency was swept using discrete increments having a value less than 1% of the fundamental frequency.

The performance of the E.U.T. was verified during the test as described in Section 7.

The test setup is illustrated in the photograph, *Figure 9. Immunity to Radiated Field Test*.

#### **Note: Opinion and Interpretation:**

The most sensitive surface of the E.U.T. was fully tested.

The most sensitive E.U.T. surface was determined as follows:

A preliminary radiated emission test in the frequency range 80 – 1000 MHz was performed inside the semi-anechoic chamber using an E-field probe and spectrum analyzer. The surface having the maximum radiation level was selected as the most sensitive surface.

### 9.3 Test Results

The E.U.T. passed the Radiated Immunity Tests as required by specifications:

EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010.

For additional information see *Figure 7*.



## Radiated Immunity

E.U.T Description    Container Tracker  
Type                    Triton R  
Serial Number:        300980


Specification: EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010  
80-1000; 1400-2700 MHz

Amplitude Modulation: 80% AM by 1 kHz

Frequency (MHz)		Antenna Polarity	Specification (V/m)	PASS / FAIL	Immunity Threshold (V/m)
<u>From</u>	<u>To</u>				
80	1000	Horizontal	3.0	Pass	
80	1000	Vertical	3.0	Pass	
1400	2700	Horizontal	3.0	Pass	
1400	2700	Vertical	3.0	Pass	

**Figure 7. Immunity to Radiated Field**

## 10. Set Up Photographs

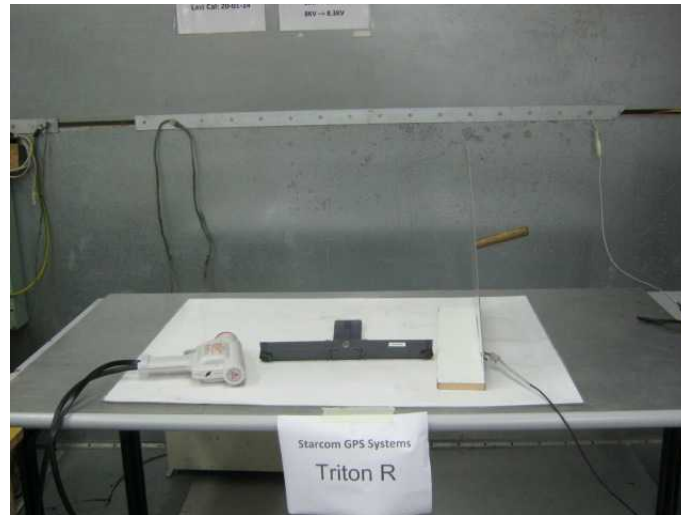



**Figure 8. Immunity to Electrostatic Discharge Test**



**Figure 9. Immunity to Radiated Field Test**



## 11. Signatures of the E.U.T's Test Engineers

Test	Test Engineer Name	Signature	Date
ESD	A. Yizhak		19.11.14
Radiated Immunity	A. Yizhak		19.11.14